

描述

- 产品尺寸: 379 x 207 x 55mm
- 水嘴高度: 218mm
- 水嘴长度: 207mm
- 金属结构, 以后缀标识区分不同表面处理工艺
- G1/2 连接进水口
- 包括 600mm 长的进水软管和带 1700mm 软管的抽拉式喷头
- 高弧形出水嘴提供了高度和伸展范围, 可用于装水或清洗锅碗, 而抽拉式喷头则提供了清洗或冲洗的可操作性
- 360° 旋转出水嘴, 可在两侧安装手柄

操作

- 杠杆式手柄, 可通过移动手柄 100° 弧度控制
- 可在拉出或缩回状态以水流或喷射模式操作
- 为水槽外的容器注水时, 暂停功能可在水管经过台面时停止水流

流量

- 当水压为 0.1Mpa 时, 水流量约为 3.0 升/分钟至 4.5 升/分钟
- 当水压为 0.1 至 0.3Mpa 时, 水流量差最大约为 3.0 升/分钟

阀芯


- 摩恩 Duralast™ 龙头阀芯

执行标准

- 符合 GB18145 标准、GB25501 (一级) 标准

质保期

- 阀芯保修期为 5 年
- 其他附件如软管、把手、混水器等保修期均为 1 年

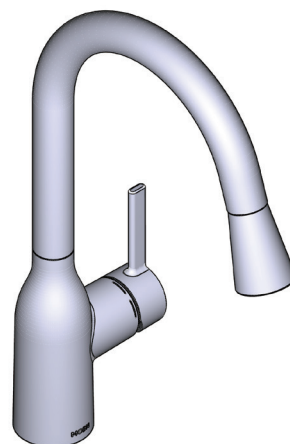


爵士系列

单把手高弧形下拉式厨房龙头

型号: GN68001 系列

注意: 该龙头可安装于最小直径 34 毫米最大直径 38 毫米的孔中。

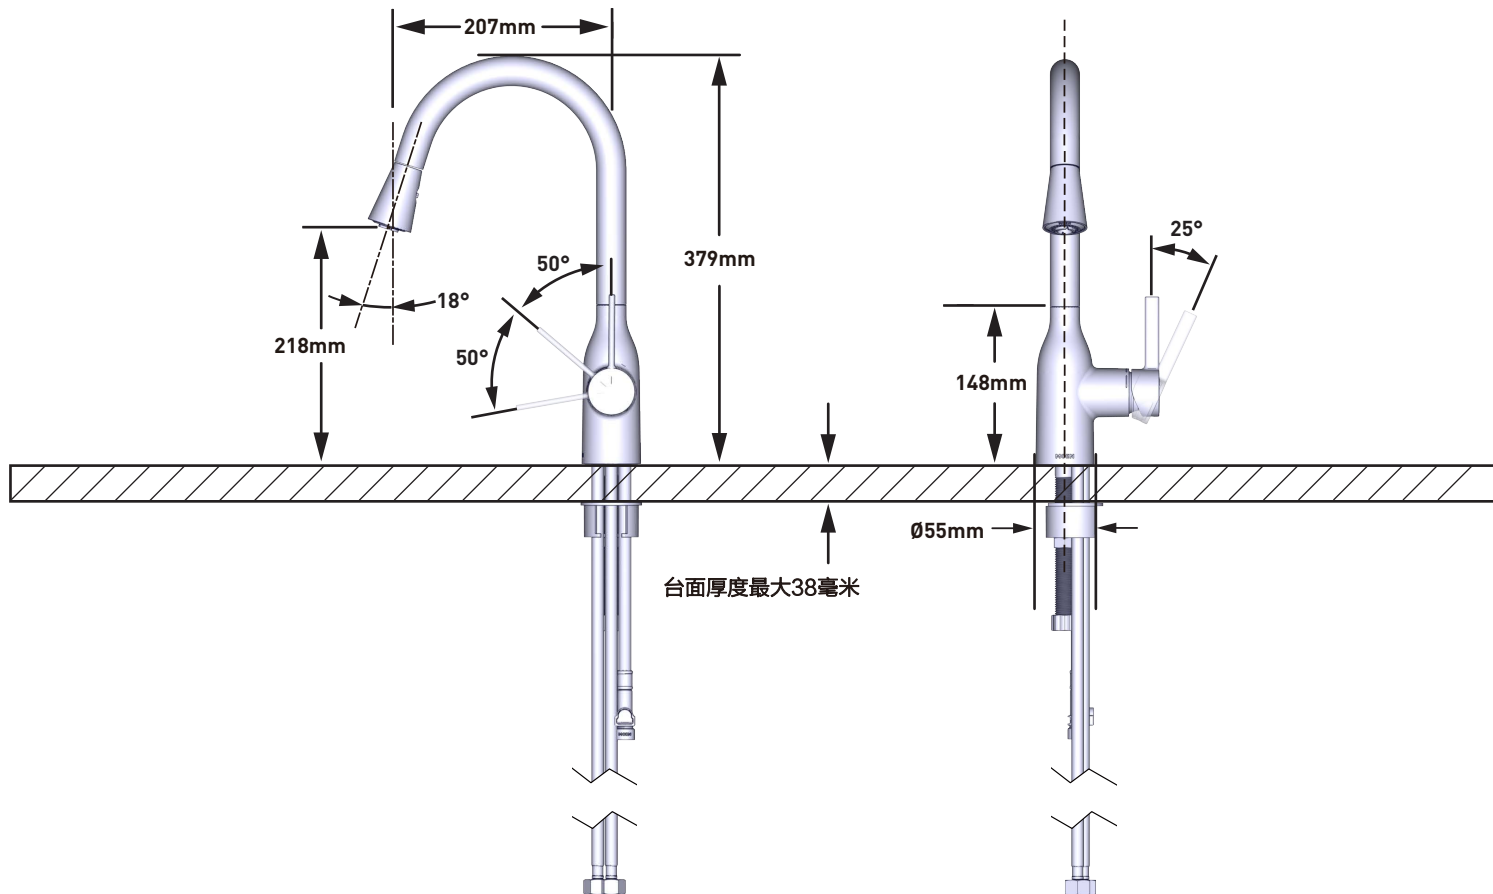

MOEN® 摩恩

SPECIFICATIONS

DESCRIPTION

- Product dimensions: 379 x 207 x 55mm
- Reach height: 218mm
- Reach length: 207mm
- Metal construction with various finishes identified by suffix
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses
- Pullout spray with 1700mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

- Water flowrate is about 3.0L/min to 4.5L/min at 0.1Mpa
- Water flow difference is limited to 3.0L/min maximum from 0.1Mpa to 0.3Mpa

CARTRIDGE


- MOEN Duralast™ cartridge

STANDARD

- Designed to meet GB 18145; GB 25501 (Grade 1)

WARRANTY

- 5-year limited warranty for cartridge
- 1-year limited warranty for other accessories (Including hose, handle, aerator, etc.)

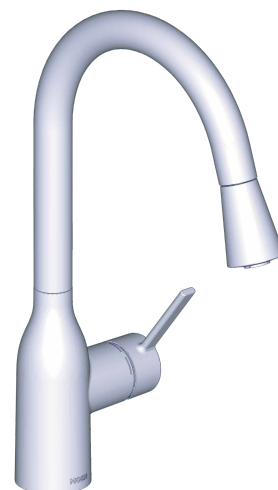

JAZZY

One-Handle High Arc Pulldown Kitchen Faucet

MODELS: GN68001 Series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX.DIA.HOLE

