

MOEN® 摩恩

Specifications

DESCRIPTION

- Reflex system offers smooth operation, easy movement, self-retraction, and secure docking
- G1/2 inlet connections
- Include 750mm flexible inlet hoses
- 180° rotating spout

OPERATION

- Lever style handle
- Pull-Down
- Temperature controlled through 90 degree arc of handle travel

FLOW

- Water flowrate is about 3.0 L/min to 4.5 L/min at 0.1 Mpa
- Water flow difference is limited to 3.0L/min maximum from 0.1 Mpa to 0.3 Mpa

CARTRIDGE


- ø35mm ceramic cartridge

STANDARDS

- Designed to meet GB 18145 and GB25501

WARRANTY



- 5 years limited warranty against leaks and drips

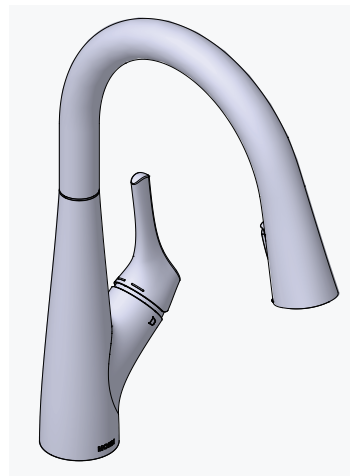

Bright

Filtration/Washing Pull-down Kitchen Faucet

MODELS: GN69700 series

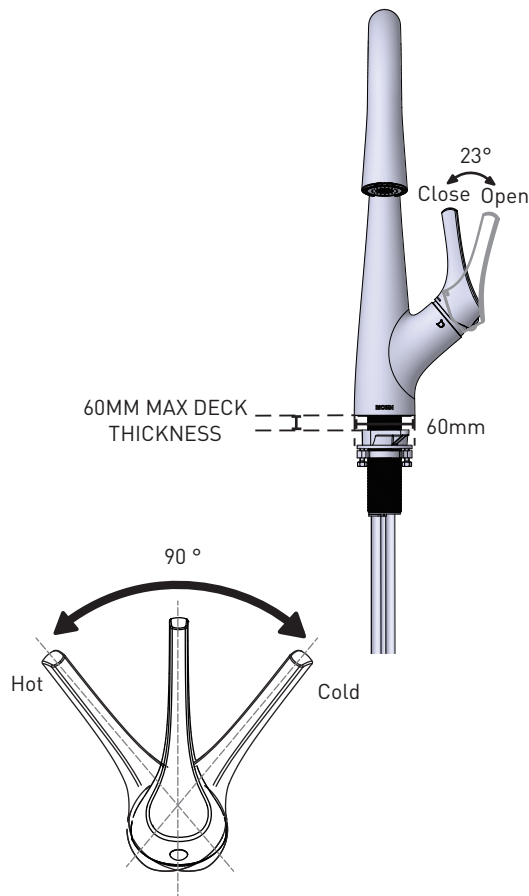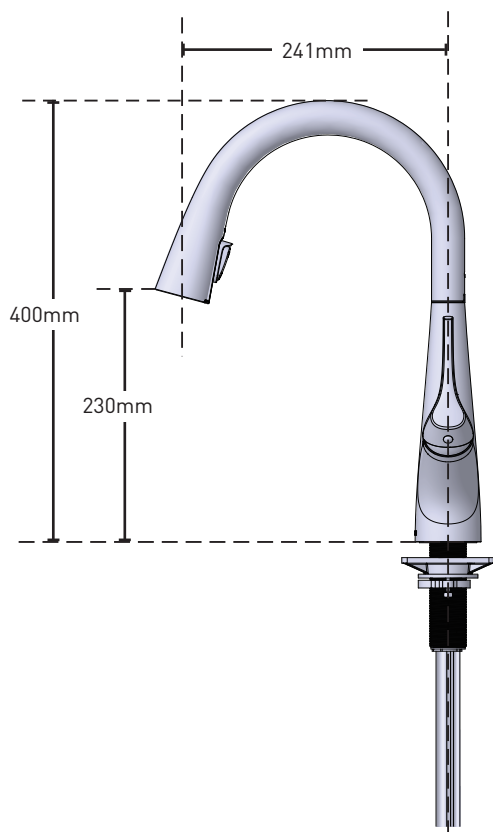

CRITICAL DIMENSIONS DO NOT SCALE